

NE-Series Padlock

High Security



Application

High Security padlock, for general use.

Operation

The shackle is locked by a double ball bearing mechanism. Rotate key 60° to unlock.

Materials

Body: case hardened steel

Shackle: hardened boron alloy steel

Finish

Black electrophoretic

Additional features

- Key retaining
- Drilling protection
- Protective shutter prevents dust contamination
- Drainage holes prevent freezing

Cylinder mechanism

Mul-T-Lock's unique high precision pick tumbler system. Pick and drill resistant for High Security needs.

Keys


Reversible nickel silver key with plastic key head and colored insert for identification. Also available in all nickel silver.

Cylinder options

- Interactive®+, MT5® platforms
- Keyed different, keyed alike
- Master keyed
- CLIQ® Access Control Systems

Standards

EN12320

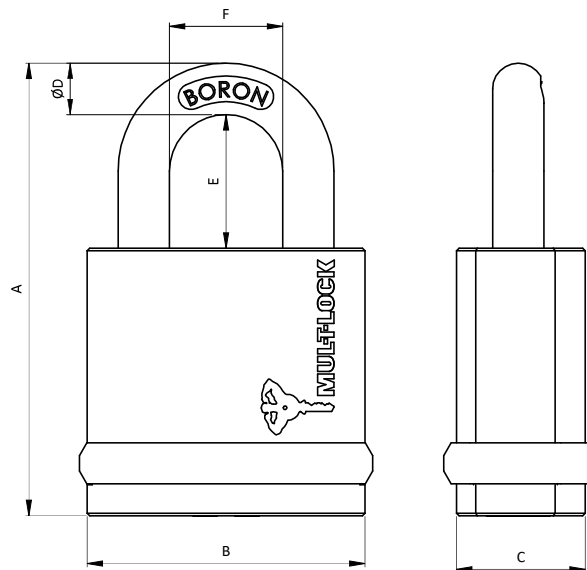

Model		Body			Shackle					Standard Grade
		A	B	C	D	E			F	
						C1	C2	C3		
NE10L	mm	95	54	25	10	25	50	100	28	4
	Inch	3.74	2.12	1	0.39	1	1.97	3.94	1.10	
NE12L	mm	101	66	28	12	25	50	100	30	5
	Inch	3.97	2.60	1.10	0.47	1	1.97	3.94	1.18	
NE14L	mm	105	66	28	14	26	50	100	32	6
	Inch	4.13	2.60	1.10	0.55	1.02	1.97	3.94	1.26	



www.mul-t-lock.com

The Mul-T-Lock name, the musclemán logo, in the field of locking products, and any other name, mark or logo used by Mul-T-Lock and marked by ® or ™ sign, are registered/pending trademarks of Mul-T-Lock Ltd. ©2019 Mul-T-Lock Technologies Ltd. 98100878-I