

NE-Series Padlock

High Security

Sliding Bolt - SBNE12



Application

High Security padlock for general use.

Operation

Rotate key 90° to unlock.

Materials

Body: case hardened steel

Bolt: hardened boron alloy steel

Finish: black electrophoretic

Additional features

- Non-key retaining
- Drilling protection
- Protective shutter to prevent dust contamination
- Durable and corrosion-resistant

Cylinder mechanism

Mul-T-Lock's unique high precision pin tumbler system. Pick and drill resistant for High Security needs.

Keys


Reversible nickel silver key with plastic key head and colored insert for identification. Also available in all nickel silver.

Cylinder options

- Interactive®+, MT5® platforms
- Keyed different, keyed alike
- Master keyed
- CLIQ® Access Control Systems

Standards

EN12320

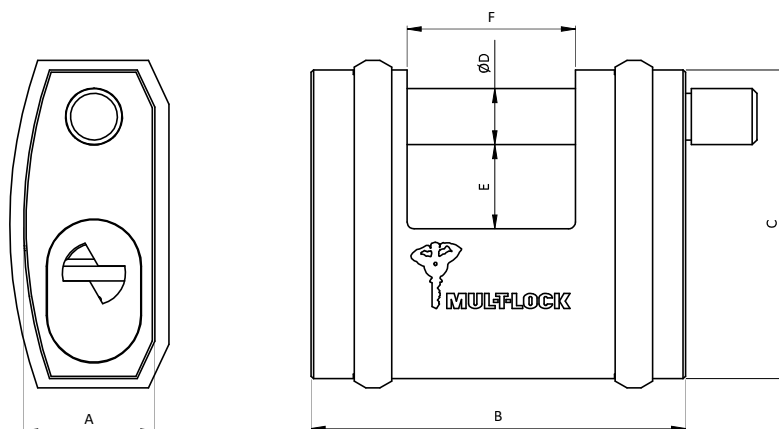

Model		Body			Bolt & Clearance			Standard Grade
		A	B	C	D	E	F	
SBNE12	mm	28	80	66	12	18	36	5
	Inch	1.10	3.15	2.60	0.47	0.71	1.42	

